

Part Number: 5848c

5848c Zero Client for Citrix *Compact Virtual System*

Our 5848c Zero Client is designed to deliver secure, uncompromised performance to the end-user while all but eliminating maintenance at the desktop level. This unit offers fast boot-up speeds and low energy consumption of only 12 watts.

The 5848c comes with 10ZiG's FREE management utility enabling simple troubleshooting solutions, OS updates and software installs, ultimately cutting out the need for additional IT administration, thus lowering the total cost of ownership.

By choosing a 10ZiG Zero Client, you can be sure the end-users will receive a seamless end-user experience, multiple monitor support, HD Audio and five USB ports.

▶ Certified for Citrix HDX	▶ FREE Centralized Management
▶ Supports Citrix XenDesktop/XenApp	▶ VESA Mounting Capability
▶ Supports Citrix VDI-in-a-Box	▶ No Virus/Spyware Exposure
▶ Rich Multi-Media Experience	▶ Optional Wireless Support



Americas
EMEA
APAC

P: 866-865-5250
P: +44 (0) 1162 148650
P: 1300 768 799


E: info@10ZiG.com
E: info@10ZiG.eu
E: info@10ZiG.com.au

W: www.10ZiG.com
W: www.10ZiG.eu
W: www.10ZiG.com.au

5848c Zero Clients for VDI

5848c Model

System	
Management	10ZiG Centralized Management Utility
Form Factor	Ultra Mini
Processor	Intel Atom D2550 Dual Core 1.86GHz
Chipset	Intel NM10 Integrated Graphics Media Accelerator 3650
Dimensions	
Device	1.7"(W) x 7.8"(H) x 5.1"(D) - 42mm x 198mm x 140mm
Weight	2.53lbs (1.15kg)
Connections	
Ports	USB x 5, Mic-In x 1, Line-Out x 1, PS2 x 1, RJ-45 LAN, DC jack x 1
Video/Audio	DVI-I x 1 (VGA Supported with Optional Adapter), DVI-D x 1, 1920 x 1200
Networking	
Wireless	Optional (Dual Band (2.4Ghz/5GHz) a/b/g/n 300Mbps)
Ethernet	10/100/1000 Base-T
Environmental	
Operating Temp.	32-95F (0-25C), 20-80% non-condensing humidity
Power	12 Watt Consumption, 36 Watt, DC-12V/3A External Power Adapter

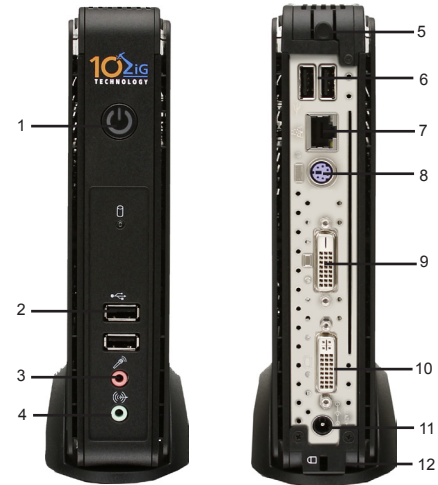

SPECIFICATIONS

1. Power Button (LED inside)
2. Front USB (2)
3. Mic In
4. Line Out
5. Secure USB (1)
6. Rear USB (2)
7. Ethernet - RJ45 (Gigabit) LAN port
8. PS2 port
9. DVI-D
10. DVI-I
11. DC Jack
12. Kensington Lock

WARRANTY: All Thin Clients include a 3-Year Advanced Exchange Warranty

VESA Mounting Capable



5848c	
Operating System	NOS
Memory	
RAM	MIN: 1GB MAX: 4GB
Software	
Software Applications	VNC Server
VDI Connection Brokers Supported	Citrix Receiver with HDX